


Technical data and dimensions

Type	Type 15/12 W	Type 15/15 W	Type 15/18 W	Type 15/23 W	Type 15/30 W
Operating Voltage (V)	1 – 230				
Rated frequency (Hz)	50				
Max. torque (Nm)	120	150	180	230	300
Speed (rpm)	12				
Current (A)	3.4	3.5	3.7	3.9	5.4
Power (W)	700	740	780	810	1,250
Shaft Ø (mm)	98				
Ingress protection (IP)	44				
Max. limit switch range in Revolutions of the shaft	36				
Operating mode (KB in min.)	6			5	
Door cycles per hour \pm h ⁻¹ *	6				
Length A (mm)	610			650	
Length B (mm)	560			600	
Weight (kg)	11.4			13	
Temperature range (°C)	-20 to +60				
Conformity					
Connecting cable (m)	3.0				

* One door cycle is: 5 revolutions OPEN – 30 sec. pause – CLOSE

Item Number	32 301.0002	32 281.0002	32 321.0002	32 361.0002	32 381.0002
-------------	-------------	-------------	-------------	-------------	-------------

Wall bracket pocket	•				
Item Number 23 100.0001					
Wall bracket plate	•				
Item Number 13 301.4901					

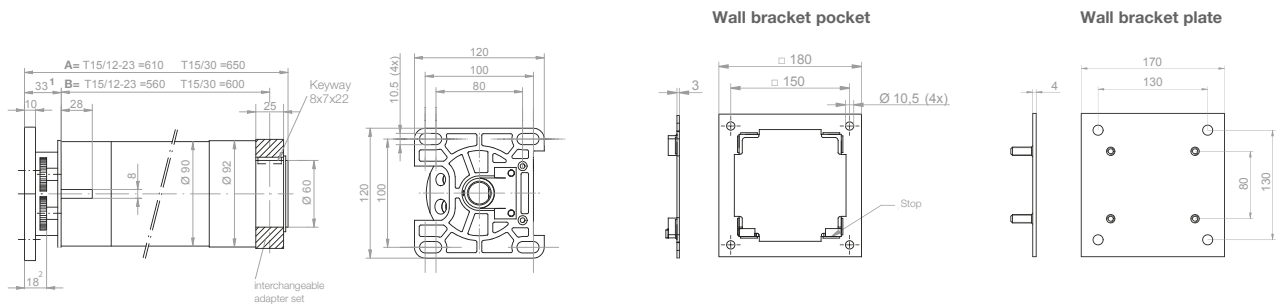

- 1) Lateral space requirements
- 2) Lateral space requirements in case of overwinding of the limit switch

Accessories



Drive adapter sets
Page 266



Wall bracket pocket
Page 266



Wall bracket plate
Page 266



Door controls
from page 294



Angle bracket 13 305.9201
Page 266